

Tru-Cut 16" (400mm) Dry Cut Metal Saw

Perfect for cutting tubular, solid, angled and other shapes.

The ideal saw for Sample Cutting, Industrial Applications and Fabrication Shops

Model TC16DC Specs:

- Motor: 3HP, 220V/60Hz, 16 Amps
- Rotation Speed: 2-speed 680/380 RPM
- Miter Range: 0 - 45°
- Square Tubing 90° 5-1/8" x 5-1/8"
- Square Tubing 45°: 3-1/8" x 3-1/8"
- Rectangular 90°: 6-1/4" x 5-1/8"
- Rectangular 45°: 5-1/4" x 3-1/8"
- Round Tubing 90°: to 5-3/4"
- Round Tubing 45°: to 3-1/8"
- (Tubing efficiently cut to 1/2" wall thickness)
- Solid Rounds 90°: to 2-3/4"
- Solid Rounds 45°: to 2"
- Weight: 479 lbs.
- Dimensions: Floor print: 34" x 35"
- Height: 74"

Features:

- Miter cut (45° left & right)
- Self-centering vise for accurate, burr-free cuts
- Vise clamps on both sides of the blade
- 2 Speeds
 - 380 RPM – 1600 SFPM (Mild Steel & Stainless Steel)
 - 580 RPM – 2850 SFPM (Aluminum, Brass & Copper)
- Chip tray for easy clean-up
- Standard 220V single phase motor
- Optional 220V 3-phase motor




Model T16DC

Tru-Cut Saw

1 . 8 0 0 . 8 7 8 . 8 7 6 1

Tru-Cut 16" (400mm) Dry Cut Metal Saw

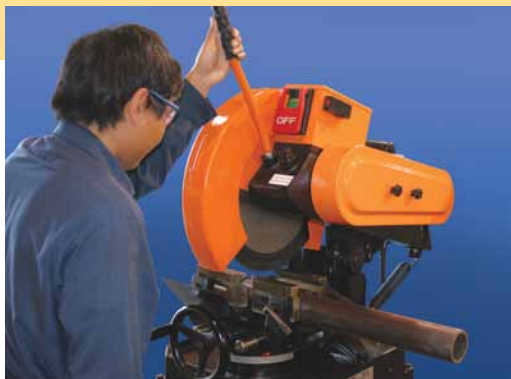

Saw blades available for the Tru-Cut Dry Cut Metal Saw

Diameter	Bore	Tooth Count
12"	1"	72
12"	1"	80
14"	1"	60
14"	1"	72
14"	1"	80
14"	1"	90
16"	1"	60
16"	1"	72
16"	1"	80
16"	1"	100

Saw blades available with TiN, TiCN, AlTiN coatings for extended tool life.

Tru-Cut Saw

TRU-CUT SAW, INC.

2903 Interstate Parkway
Brunswick, Ohio 44212 USA
Phone: 330.225.4090
Toll Free: 800.878.8761
Fax: 330.225.4741
E-mail: trucutsaw@trucutsaw.com
Web: www.trucutsaw.com

Chicago Office


Phone: 773.580.0811

Tru-Cut industrial metal cutting carbide tipped circular saws

Features:

- Thin kerf, PVD coated, premium tungsten carbide-tipped blades for long life.
- Blades fit all types of dry cut sawing machines.
- Designed to cut all shapes and sizes of steel.
- Great for structurals, pipe, threaded rod, plate and sheet metal.

Call today for a quote!

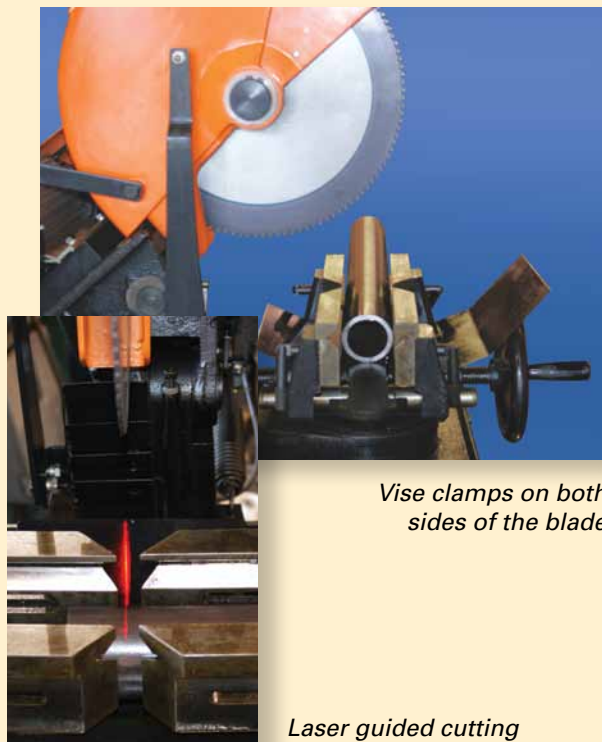

Vise clamps on both sides of the blade

Laser guided cutting